




**Торцовые уплотнения  
соответствуют ВТ-FN, T04, R3, V13, NS-1**

*Применяется в насосах фирм Ebara, Calpeda, Pedrollo, Inoxpa*

	<p><b>Тип ВТ-FN (DIN 24250)</b></p> <p>Диаметр вала от 10 до 40 мм Температура от -15 до 90 °С Частота вращения до 3000 об/мин Утечка менее 0,2 см<sup>3</sup>/ч</p> <p>Пара трения: графит по керамике Эластомерные детали: нитрильная резина</p>
--	--

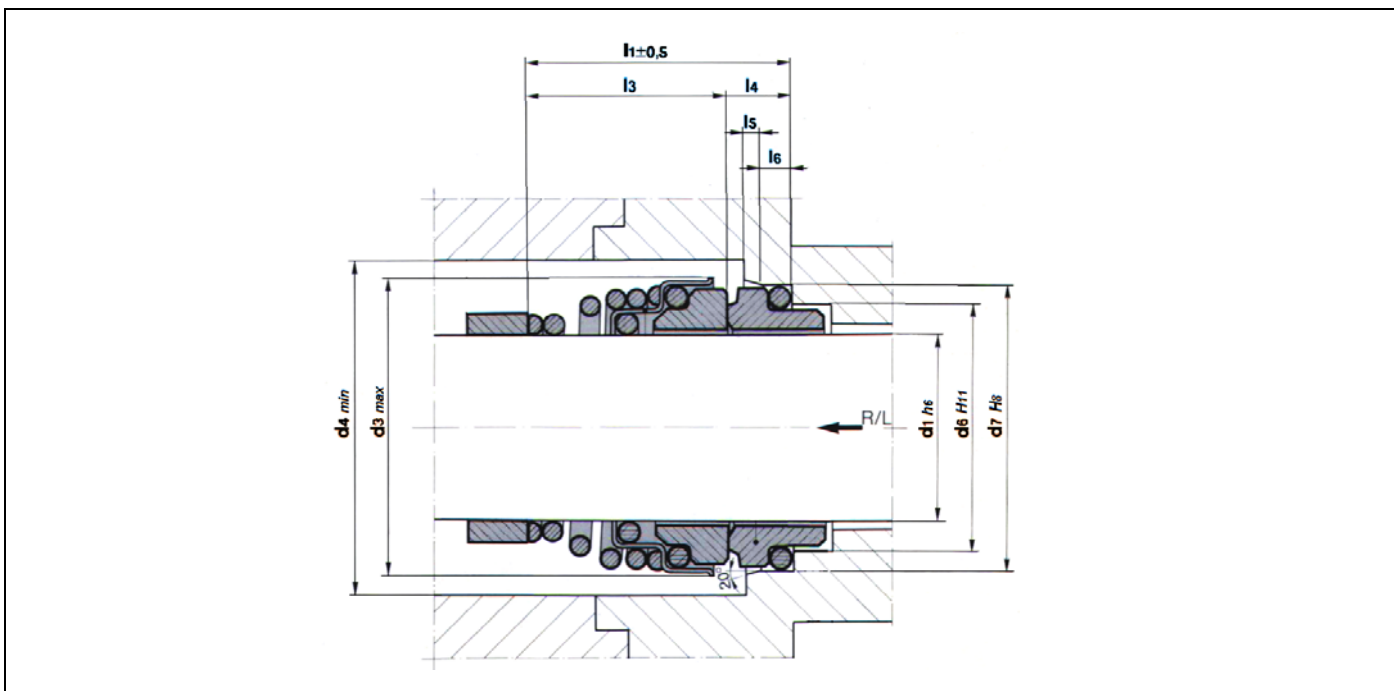

d <sub>1</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>6</sub>	d <sub>7</sub>	l <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>	d <sub>1</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>6</sub>	d <sub>7</sub>	l <sub>1</sub>	l <sub>3</sub>	l <sub>4</sub>	l <sub>5</sub>	l <sub>6</sub>
10	19,9	22	14	18,1	20,5	15	5,5	1,2	3	20	32,5	36	25,0	30,9	33,0	25	8,0	1,5	4
11	22,5	25	16,5	20,6	23,5	18	5,5	1,2	3	22	37,5	42	30,0	35,4	33,0	25	8,0	2,0	4
12	22,5	25	16,5	20,6	23,5	18	5,5	1,2	3	24	37,5	42	30,0	35,4	35,0	27	8,0	2,0	4
13	24,5	28	19,0	23,1	28,0	22	6,0	1,2	3	25	40,0	45	33,0	38,2	35,5	27	8,5	2,0	4
14	24,5	28	19,0	23,1	28,0	22	6,0	1,2	3	28	46,0	51	38,0	43,3	38,0	29	9,0	2,0	4
15	29,0	32	21,0	26,9	29,0	22	7,0	1,5	4	30	46,0	51	38,0	43,3	39,0	30	9,0	2,0	4
16	29,0	32	21,0	26,9	30,0	23	7,0	1,5	4	32	46,0	51	38,0	43,3	39,0	30	9,0	2,0	4
17	29,0	32	21,0	26,9	30,0	23	7,0	1,5	4	35	50,0	55	45,0	53,5	50,5	39	11,5	2,0	6
18	32,5	36	25,0	30,9	32,0	24	8,0	1,5	4	38	58,0	68	52,0	60,5	50,5	39	11,5	2,0	6
19	32,5	36	25,0	30,9	33,0	25	8,0	1,5	4	40	58,0	68	52,0	60,5	50,5	39	11,5	2,0	6

Если у Вас возникнут вопросы, обращайтесь к нашим специалистам по телефону (499) 157-25-64 или электронной почте [info@pumps-seals.ru](mailto:info@pumps-seals.ru)